



New Product Information(新產品資訊) **USB3.2, Type C Flat-Cable**

Product Description (產品說明) :

Made in TAIWAN


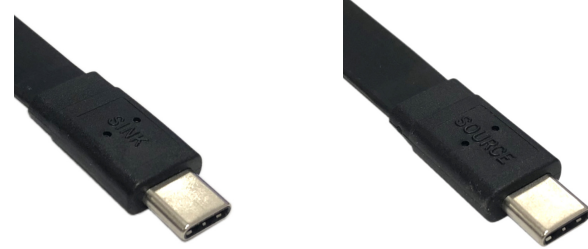






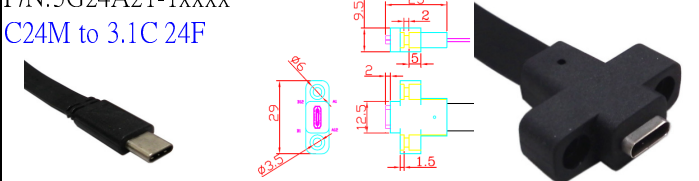


USB3.2 C Gen.2 C24M & Virtual-Link Connection Solution.

Applications (用途) :

USB3.2 C Gen.2 20G/10G,TB3 40G,Retimer,Redriver cable. Hotswappable & reversible plug.
 USB3.2 C Gen.2 20G/10G,TB3 40G,Retimer,Redriver 連接線。 外接可熱插拔,無正反向。

Features (特色) :

- (1) Halogen free. The cable is only 1.25mm thin. Already acquired invention patents in many countries.
 無鹵線材，厚度僅1.25mm的超薄線材，獲多國發明專利。
- (2) Support Gen.2 10G/20G/ TB3 40G bps speed. Support Alternative modes, e.g. DP, HDMI, PCIe etc.
 支援Gen.2 10G/20G ,TB3 40G 傳輸速率。支援 alternative mode，可傳輸DP,HDMI,PCIe訊號。
- (3) 180° Bendable. Impedance stable. Length choices from 5cm to 1M. Support PD output up to 20V, 5A max.
 可彎折180度，高頻特性不受影響。線材長度可從5~100cm，支援PD電源輸出,可達5A/20V。

<p>P/N:XAA-268-24MA Sink Redrive,C24M,21P,P0.5mm</p> 	<p>3.1C24M MOLD 24 HRs R/W TEST Video https://youtu.be/196348M9qGI</p> 	<p>Ultra slim H=5mm</p> 
<p>P/N:5G24B02-1xxxx C24M to U3 A9M MOLD</p> 	<p>P/N:5G24A16-1xxxx 3.1C24M *2,With E-mark</p> 	<p>P/N:5G24A36-10800 C24M *2 support ThunderBolt 3,40G P/N:5G24A39-1xxxx C24M *2 VirtualLink cable,4DP+U3 10G P/N:5G24A32-12000 C24M *2 SINK redrive + Emark, 2M support ALT. mode DP1.4 *2 Lane+ 3.1C Gen.2 *2 Lane P/N:5G24A31-13000 C24M *2 SINK redrive + Emark, 3M support DP1.4 mode DP1.4 *4 Lane+ USB2.0 *1 P/N:5G24A38-15000 C24M *2 retimer + Emark, 5M support ALT. mode Source + Sink,both side,Gen.2 10G</p>
<p>P/N:5G24A03-1xxxx C24M to U3 mB10M MOLD</p> 	<p>P/N:5G24A15-1xxxx 3.1C24M *2,W/O E-mark</p> 	<p>P/N:5G24A37-1xxxx U3A9M 10G/C24M 10G (host) to C24M(device), 2 in1, V cable. patent</p> 
<p>P/N:5G24B01-1xxxx C24M to U3A9F MOLD</p> 	<p>P/N:5G24A09-1xxxx 3.1C24M *2,SSD only,LowCost</p> 	<p>P/N:5G24A21-1xxxx C24M to 3.1C 24F</p> 
<p>P/N:5G24A04-1xxxx C24M to U3 B9M MOLD</p> 	<p>P/N:5G24A45-1xxxx C24M to U3A9F,W/EARS</p> 	<p>P/N:5G24A23-1xxxx 3.1C 24F*2</p> 