


REV.	ZONE	DESCRIPTION	DATE	REVISER	APPD

WIRING TABLE

HOST BASE P5		TARGET BASE PINOUT2	
GND	B1	(KEY) 1	(KEY) GND
TX0+	B2	2	TX+
TX0-	B3	3	TX-
GND	A1	4	GND
RX0-	A3	5	RX-
RX0+	A2	6	RX+
		7	GND
GND	B4	(KEY) 1	(KEY) GND
TX1+	B5	2	TX+
TX1-	B6	3	TX-
GND	A4	4	GND
RX1-	A6	5	RX-
RX1+	A5	6	RX+
		7	GND
GND	B7	(KEY) 1	(KEY) GND
TX2+	B8	2	TX+
TX2-	B9	3	TX-
GND	A7	4	GND
RX2-	A9	5	RX-
RX2+	A8	6	RX+
		7	GND
GND	B10	(KEY) 1	(KEY) GND
TX3+	B11	2	TX+
TX3-	B12	3	TX-
GND	A10	4	GND
RX3-	A12	5	RX-
RX3+	A11	6	RX+
GND	A13	7	GND

SHELL GROUND

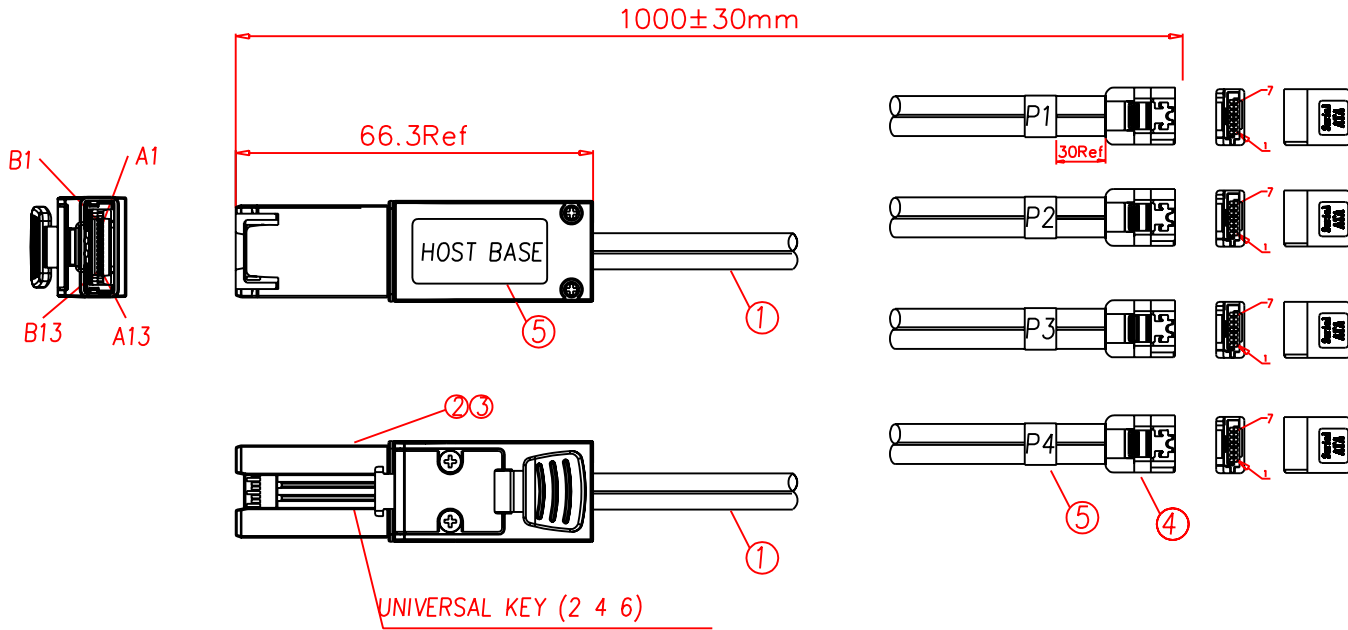

塑膠袋需加貼SAS-120客料標籤&條碼7340004638063

5	LABEL	5
4	SATA 7POS LATCH TYPE CONNECTOR w/OVERMOLD	4
3	26PIN UNIVERSAL KEY (2,4,6) COVER KIT W/BLUE LATCH	1
2	26PIN CABLE END CONNECTOR	1
1	SATA CABLE (28AWG x 2PAIR),100ohm, , UL APPROVE	4
ITEM	DESCRIPTION	Q'TY

高位企業有限公司 Yes Way Enterprise Corp.		TOLERANCE UNSPECIFIED	
SCALE X		.000 ± .00 ± .0 ± ±	
NAME MINI SAS 26PIN TO 4X SATA CABLE ASS'Y		SHEET 1 / 1	
DRAWING NO. 5C26A05-X100-A		REV A0	
DRAWN 7/5/2007 Vivian		DESIGNER Reo	
CHECKED Jenny		APPROVED Tim	
RoHS product		A3	